

SCL P - SCM Ni-Cd single cells

Capacity: 10 Ah to 70 Ah

Nickel-cadmium single cells are designed for general purpose applications, where maximum operating reliability is a key factor:

- switch tripping
- emergency lighting
- alarms
- DC instrumentation

SCL P cells are designed for long discharge periods, typically 2 hours and longer.

SCM cells are designed for medium discharge periods between 30 minutes and 3 hours.



Benefits

- They provide a long service life, minor maintenance requirements, outstanding resistance to electrical and mechanical abuse, excellent charge retention, a long shelf life and long operation over a wide temperature range.
- Translucent polypropylene containers allow visibility of the electrolyte level, hence facilitating maintenance in stationary applications.
- The junction between the lid and the container is thermo-welded, ensuring good mechanical and electrical resistance.
- Flip top vents assure an easy maintenance.
- The products are qualified according IEC 60623.




Mechanical characteristics

Cell type	Capacity C ₅ A (Ah)	Electrolyte reserve		Weight per cell		Dimensions (mm)						Terminal
		(cm ²)	(in ²)	kg	lbs.	Height (H)		Width (W)		Length (L1)		
						mm	in	mm	in	mm	in	
SCL 10 P	10	80	4.88	0.9	1.98	177	6.97	122.5	4.83	33.5	1.32	M 6
SCL 20 P	20	80	4.88	1.1	2.43	177	6.97	122.5	4.83	33.5	1.32	M 6
SCL 30 P	30	165	10.1	1.8	3.97	237	9.34	122.5	4.83	44.5	1.75	M 6
SCL 40 P	40	165	10.1	1.9	4.19	237	9.34	122.5	4.83	44.5	1.75	M 6
SCL 55 P	55	195	14.0	2.8	6.17	291	11.5	122.5	4.83	54.5	2.15	M 10
SCL 70 P	70	195	14.0	3.1	6.84	291	11.5	122.5	4.83	54.5	2.15	M 10
SCM 11	11	115	7.02	1.7	3.75	287	11.3	87	3.43	46	1.81	M 10
SCM 18	18	110	6.71	1.9	4.19	287	11.3	87	3.43	46	1.81	M 10
SCM 25	25	105	6.41	2.0	4.41	287	11.3	87	3.43	46	1.81	M 10
SCM 32	32	230	14.0	3.0	6.62	287	11.3	87	3.43	86	3.39	M 10
SCM 38	38	225	13.7	3.2	7.06	287	11.3	87	3.43	86	3.39	M 10
SCM 45	45	215	13.1	3.4	7.50	287	11.3	87	3.43	86	3.39	M 10
SCM 53	53	210	12.8	3.6	7.94	287	11.3	87	3.43	86	3.39	M 10
SCM 59	59	205	12.5	3.7	8.16	287	11.3	87	3.43	86	3.39	M 10



Committed to a clean environment

Saft takes seriously its responsibility to safeguard the environment. At several sites worldwide, more than 99% of metals contained in the battery are recycled. This process safeguards valuable natural resources and is a service to customers that Saft will continue to offer for future generations.

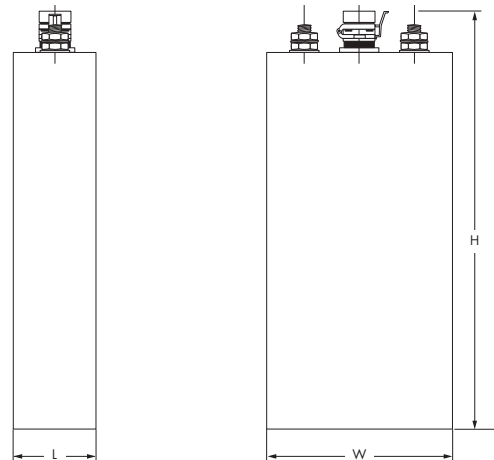

Cells performances

Cell performance L type at +20°C ± 5°C (+68°F ± 9°F)

Performance for fully charged cells by a constant current charge according to IEC 60623 standard
Available amperes

Final voltage: 1.00 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	1.13	1.36	2.00	3.03	4.05	4.87	6.10	7.00	8.20
SCL 20 P	20	2.26	2.73	4.00	6.07	8.10	9.73	12.2	14.0	16.4
SCL 30 P	30	3.27	3.94	6.00	9.50	13.2	16.0	19.8	22.4	25.8
SCL 40 P	40	4.36	5.25	8.00	12.7	17.6	21.3	26.4	29.9	34.4
SCL 55 P	55	5.83	7.22	11.0	17.8	25.3	30.8	38.5	44.0	50.6
SCL 70 P	70	7.42	9.19	14.0	22.6	32.2	39.2	49.0	56.0	64.4

Final voltage: 1.05 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	1.09	1.33	1.92	2.80	3.60	4.27	5.20	6.00	7.00
SCL 20 P	20	2.18	2.65	3.84	5.60	7.20	8.53	10.4	12.0	14.0
SCL 30 P	30	3.18	3.90	5.82	8.90	12.0	14.4	18.0	20.0	22.8
SCL 40 P	40	4.24	5.20	7.76	11.9	16.0	19.2	24.0	26.7	30.4
SCL 55 P	55	5.83	7.15	10.8	17.2	24.2	29.0	35.2	39.6	44.0
SCL 70 P	70	7.42	9.10	13.7	21.9	30.8	36.9	44.8	50.4	56.0

Final voltage: 1.10 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	1.04	1.26	1.82	2.57	3.15	3.60	4.20	4.80	5.60
SCL 20 P	20	2.08	2.53	3.64	5.13	6.30	7.20	8.40	9.60	11.2
SCL 30 P	30	3.12	3.83	5.70	8.20	10.4	12.0	14.7	16.4	19.2
SCL 40 P	40	4.16	5.10	7.60	10.9	13.8	16.0	19.6	21.9	25.6
SCL 55 P	55	5.72	7.01	10.6	15.6	20.4	24.2	29.7	33.7	38.5
SCL 70 P	70	7.28	8.93	13.4	19.8	25.9	30.8	37.8	42.9	49.0

Final voltage: 1.14 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	0.97	1.15	1.60	2.20	2.70	3.07	3.60	4.00	4.40
SCL 20 P	20	1.94	2.30	3.20	4.40	5.40	6.13	7.20	8.00	8.80
SCL 30 P	30	3.00	3.64	5.40	7.50	9.15	10.2	12.0	12.8	14.4
SCL 40 P	40	4.00	4.85	7.20	10.0	12.2	13.6	16.0	17.1	19.2
SCL 55 P	55	5.61	6.81	10.1	14.1	17.6	19.8	23.1	25.7	29.7
SCL 70 P	70	7.14	8.66	12.9	18.0	22.4	25.2	29.4	32.7	37.8

Cell performance M type at +20°C ± 5°C (+68°F ± 9°F)

Performance for fully charged cells by a constant current charge according to IEC 60623 standard
Available amperes

Final voltage: 1.00 V/cell

Cell type	C ₅ Ah	Hours					Minutes							Seconds				
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.12	1.39	2.20	3.56	5.12	6.60	9.13	11.3	14.7	18.5	21.1	24.4	29.0	44.0	46.2	59.4	72.6
SCM 18	18	1.83	2.27	3.60	5.82	8.37	10.8	14.9	18.5	24.1	30.2	34.6	40.0	47.5	72.0	75.6	97.2	119
SCM 25	25	2.54	3.15	5.00	8.08	11.6	15.0	20.8	25.7	33.5	42.0	48.0	55.5	66.0	100	105	135	165
SCM 32	32	3.25	4.03	6.40	10.3	14.9	19.2	26.6	32.9	42.9	53.8	61.4	71.0	84.5	128	134	173	211
SCM 38	38	3.86	4.79	7.60	12.3	17.7	22.8	31.5	39.0	50.9	63.8	73.0	84.4	100	152	160	205	251
SCM 45	45	4.57	5.67	9.00	14.6	21.0	27.0	37.3	46.2	60.3	75.6	86.4	99.9	118	180	189	243	297
SCM 53	53	5.38	6.68	10.6	17.1	24.6	31.8	44.0	54.4	71.0	89.0	102	118	140	212	223	286	350
SCM 59	59	5.99	7.43	11.8	19.1	27.4	35.4	49.0	60.6	79.1	99.1	113	131	156	236	248	319	389

Final voltage: 1.05 V/cell

Cell type	C ₅ Ah	Hours					Minutes							Seconds				
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.11	1.38	2.18	3.52	5.06	6.38	8.80	10.7	13.4	16.2	18.0	20.5	25.1	36.3	40.7	51.7	62.7
SCM 18	18	1.81	2.25	3.56	5.76	8.28	10.4	14.4	17.5	22.0	26.5	29.5	33.5	41.0	59.4	66.6	84.6	103
SCM 25	25	2.52	3.13	4.95	8.00	11.5	14.5	20.0	24.3	30.5	36.8	41.0	46.5	57.0	82.5	92.5	118	143
SCM 32	32	3.22	4.00	6.34	10.2	14.7	18.6	25.6	31.1	39.0	47.0	52.5	59.5	73.0	106	118	150	182
SCM 38	38	3.83	4.75	7.52	12.2	17.5	22.0	30.4	37.0	46.4	55.9	62.3	70.7	86.6	125	141	179	217
SCM 45	45	4.54	5.63	8.91	14.4	20.7	26.1	36.0	43.8	54.9	66.2	73.8	83.7	103	148	167	212	257
SCM 53	53	5.34	6.63	10.5	17.0	24.4	30.7	42.4	51.6	64.7	77.9	86.9	98.6	121	175	196	249	302
SCM 59	59	5.94	7.38	11.7	18.9	27.1	34.2	47.2	57.4	72.0	86.7	96.8	110	135	195	218	277	336

Final voltage: 1.10 V/cell

Cell type	C ₅ Ah	Hours					Minutes							Seconds				
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.09	1.35	2.13	3.41	4.84	6.01	7.81	9.09	11.4	13.5	15.0	17.2	19.8	30.8	34.1	44.0	52.8
SCM 18	18	1.78	2.21	3.49	5.58	7.92	9.84	12.8	14.9	18.7	22.1	24.5	28.1	32.4	50.4	55.8	72.0	86.4
SCM 25	25	2.48	3.08	4.85	7.75	11.0	13.7	17.8	20.7	26.0	30.8	34.0	39.0	45.0	70.0	77.5	100	120
SCM 32	32	3.17	3.94	6.21	9.92	14.1	17.5	22.7	26.5	33.3	39.4	43.5	49.9	57.6	89.6	99.2	128	154
SCM 38	38	3.77	4.67	7.37	11.8	16.7	20.8	27.0	31.4	39.5	46.7	51.7	59.3	68.4	106	118	152	182
SCM 45	45	4.46	5.53	8.73	14.0	19.8	24.6	32.0	37.2	46.8	55.3	61.2	70.2	81.0	126	140	180	216
SCM 53	53	5.25	6.52	10.3	16.4	23.3	29.0	37.6	43.8	55.1	65.2	72.1	82.7	95.4	148	164	212	254
SCM 59	59	5.85	7.26	11.4	18.3	26.0	32.3	41.9	48.8	61.4	72.6	80.2	92.0	106	165	183	236	283

Final voltage: 1.14 V/cell

Cell type	C ₅ Ah	Hours					Minutes							Seconds				
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.06	1.32	2.07	3.23	4.40	5.35	6.71	7.63	9.02	10.6	11.9	13.9	17.2	26.4	29.7	37.4	46.2
SCM 18	18	1.74	2.16	3.38	5.28	7.20	8.76	11.0	12.5	14.8	17.3	19.4	22.7	28.1	43.2	48.6	61.2	75.6
SCM 25	25	2.42	3.00	4.70	7.33	10.0	12.2	15.3	17.3	20.5	24.0	27.0	31.5	39.0	60.0	67.5	85.0	105
SCM 32	32	3.09	3.84	6.02	9.39	12.8	15.6	19.5	22.2	26.2	30.7	34.6	40.3	49.9	76.8	86.4	109	134
SCM 38	38	3.67	4.56	7.14	11.2	15.2	18.5	23.2	26.4	31.2	36.5	41.0	47.9	59.3	91.2	103	129	160
SCM 45	45	4.35	5.40	8.46	13.2	18.0	21.9	27.5	31.2	36.9	43.2	48.6	56.7	70.2	108	122	153	189
SCM 53	53	5.13	6.36	9.96	15.6	21.2	25.8	32.3	36.8	43.5	50.9	57.2	66.8	82.7	127	143	180	223
SCM 59	59	5.71	7.08	11.1	17.3	23.6	28.7	36.0	40.9	48.4	56.6	63.7	74.3	92.0	142	159	201	248

Cell performance L type at +20°C ± 5°C (+68°F ± 9°F)

Performance after prolonged float charge of for fully charged cells

Available amperes

Final voltage: 1.00 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	1.13	1.36	2.00	3.03	3.85	4.38	5.31	5.95	6.81
SCL 20 P	20	2.26	2.73	4.00	6.07	7.70	8.76	10.6	11.9	13.6
SCL 30 P	30	3.27	3.94	6.00	9.50	12.5	14.4	17.2	19.0	21.4
SCL 40 P	40	4.36	5.25	8.00	12.7	16.7	19.2	23.0	25.4	28.6
SCL 55 P	55	5.83	7.22	11.0	17.8	24.0	27.7	33.5	37.4	42.0
SCL 70 P	70	7.42	9.19	14.0	22.6	30.6	35.3	42.6	47.6	53.5

Final voltage: 1.05 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	1.09	1.33	1.92	2.55	3.10	3.58	4.21	4.77	5.46
SCL 20 P	20	2.18	2.65	3.84	5.10	6.19	7.17	8.42	9.54	10.9
SCL 30 P	30	3.18	3.90	5.82	8.10	10.3	12.1	14.6	15.9	17.8
SCL 40 P	40	4.24	5.20	7.76	10.8	13.8	16.1	19.4	21.2	23.7
SCL 55 P	55	5.83	7.15	10.8	15.7	20.8	24.3	28.5	31.5	34.3
SCL 70 P	70	7.42	9.10	13.7	20.0	26.5	31.0	36.3	40.1	43.7

Final voltage: 1.10 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	1.04	1.22	1.64	2.13	2.52	2.81	3.19	3.58	4.09
SCL 20 P	20	2.08	2.45	3.28	4.26	5.04	5.62	6.38	7.15	8.18
SCL 30 P	30	3.12	3.71	5.13	6.81	8.28	9.36	11.2	12.2	14.0
SCL 40 P	40	4.16	4.95	6.84	9.07	11.0	12.5	14.9	16.3	18.7
SCL 55 P	55	5.72	6.80	9.50	12.9	16.3	18.9	22.6	25.1	28.1
SCL 70 P	70	7.28	8.66	12.1	16.5	20.7	24.0	28.7	32.0	35.8

Final voltage: 1.14 V/cell

Cell type	C ₅ Ah	Hours					Minutes			
		10	8	5	3	2	90	60	45	30
SCL 10 P	10	0.97	1.09	1.30	1.67	2.00	2.24	2.56	2.78	2.99
SCL 20 P	20	1.94	2.19	2.59	3.34	4.00	4.48	5.11	5.56	5.98
SCL 30 P	30	3.00	3.46	4.37	5.70	6.77	7.45	8.52	8.90	9.79
SCL 40 P	40	4.00	4.61	5.83	7.60	9.03	9.93	11.4	11.9	13.1
SCL 55 P	55	5.61	6.47	8.20	10.7	13.0	14.5	16.4	17.8	20.2
SCL 70 P	70	7.14	8.23	10.4	13.7	16.6	18.4	20.9	22.7	25.7

Cell performance M type at +20°C ± 5°C (+68°F ± 9°F)

Performance after prolonged float charge of for fully charged cells

Available amperes

Final voltage: 1.00 V/cell

Cell type	C ₅ Ah	Hours					Minutes									Seconds		
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.12	1.39	2.20	3.56	5.12	6.14	7.94	9.54	12.1	15.2	17.1	19.5	23.2	35.2	37.0	47.5	58.1
SCM 18	18	1.83	2.27	3.60	5.82	8.37	10.0	13.0	15.6	19.8	24.8	28.0	32.0	38.0	57.6	60.5	77.8	95.0
SCM 25	25	2.54	3.15	5.00	8.08	11.6	14.0	18.1	21.7	27.5	34.4	38.9	44.4	52.8	80.0	84.0	108	132
SCM 32	32	3.25	4.03	6.40	10.3	14.9	17.9	23.1	27.8	35.2	44.1	49.8	56.8	67.6	102	108	138	169
SCM 38	38	3.86	4.79	7.60	12.3	17.7	21.2	27.4	33.0	41.8	52.3	59.1	67.5	80.3	122	128	164	201
SCM 45	45	4.57	5.67	9.00	14.5	21.0	25.2	32.5	39.1	49.5	62.0	70.0	79.9	95.1	143	152	194	238
SCM 53	53	5.38	6.68	10.6	17.1	24.6	29.6	38.3	46.0	58.2	73.0	82.4	94.1	112	170	178	229	280
SCM 59	59	5.99	7.43	11.8	19.1	27.4	32.9	42.6	51.2	64.8	81.3	91.8	105.00	125	189	198	255	312

Final voltage: 1.05 V/cell

Cell type	C ₅ Ah	Hours					Minutes									Seconds		
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.11	1.38	2.18	3.52	4.55	5.42	7.22	8.57	10.5	12.3	13.7	15.5	18.8	27.2	30.5	38.8	47.0
SCM 18	18	1.81	2.25	3.56	5.76	7.45	8.87	11.8	14.0	17.1	20.1	22.4	25.4	30.8	44.6	50.0	63.5	77.0
SCM 25	25	2.52	3.13	4.95	8.00	10.4	12.3	16.4	19.5	23.8	27.9	31.2	35.3	42.8	61.9	69.4	88.1	107
SCM 32	32	3.22	4.00	6.34	10.2	13.2	15.8	21.0	24.9	30.5	35.8	39.9	45.2	54.7	79.2	88.8	113	137
SCM 38	38	3.83	4.75	7.52	12.2	15.7	18.7	24.9	29.6	36.2	42.5	47.4	53.7	65.0	94.1	105	134	162
SCM 45	45	4.54	5.63	8.91	14.4	18.6	22.1	29.5	35.1	42.9	50.3	56.1	63.6	77.0	111	124	159	192
SCM 53	53	5.34	6.63	10.5	17.0	21.9	26.1	34.8	41.3	50.4	59.2	66.1	74.9	90.6	131	147	187	227
SCM 59	59	5.94	7.38	11.7	18.9	24.4	29.1	38.7	45.9	56.1	65.9	73.5	83.4	101.00	146	164	208	252

Final voltage: 1.10 V/cell

Cell type	C ₅ Ah	Hours					Minutes									Seconds		
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.09	1.35	2.13	3.17	4.07	4.81	6.01	6.87	8.47	9.88	10.8	12.2	14.1	21.9	24.2	31.2	37.5
SCM 18	18	1.78	2.21	3.49	5.19	6.65	7.87	9.84	11.2	13.9	16.2	17.6	19.9	23.0	35.8	39.6	51.1	61.3
SCM 25	25	2.48	3.08	4.85	7.21	9.24	10.9	13.7	15.6	19.2	22.4	24.5	27.7	32.0	49.7	55.0	71.0	85.2
SCM 32	32	3.17	3.94	6.21	9.23	11.8	14.0	17.5	20.0	24.6	28.7	31.3	35.4	40.9	63.6	70.4	90.9	109
SCM 38	38	3.77	4.67	7.37	11.0	14.0	16.6	20.8	23.7	29.2	34.1	37.2	42.1	48.6	75.5	83.6	108	130
SCM 45	45	4.46	5.53	8.73	13.0	16.6	19.7	24.6	28.1	34.6	40.4	44.1	49.9	57.6	89.4	99.0	128	154
SCM 53	53	5.25	6.52	10.3	15.3	19.6	23.2	29.0	33.1	40.8	47.6	51.9	58.7	67.7	105	117	151	181
SCM 59	59	5.85	7.26	11.4	17.0	21.8	25.8	32.3	36.8	45.4	53.0	57.8	65.3	75.4	117	130	168	201

Final voltage: 1.14 V/cell

Cell type	C ₅ Ah	Hours					Minutes									Seconds		
		10	8	5	3	2	90	60	45	30	20	15	10	5	1	30	5	1
SCM 11	11	1.06	1.32	2.07	2.74	3.39	4.02	4.83	5.38	6.22	7.18	7.96	9.29	11.5	17.7	19.9	25.1	31.0
SCM 18	18	1.74	2.16	3.38	4.49	5.54	6.57	7.91	8.80	10.2	11.8	13.0	15.2	18.8	28.9	32.6	41.0	50.7
SCM 25	25	2.42	3.00	4.70	6.23	7.70	9.13	11.0	12.2	14.1	16.3	18.1	21.1	26.1	40.2	45.2	57.0	70.4
SCM 32	32	3.09	3.84	6.02	7.98	9.86	11.7	14.1	15.6	18.1	20.9	23.2	27.0	33.4	51.5	57.9	72.9	90.0
SCM 38	38	3.67	4.56	7.14	9.47	11.7	13.9	16.7	18.6	21.5	24.8	27.5	32.1	39.7	61.1	68.7	86.6	107
SCM 45	45	4.35	5.40	8.46	11.2	13.9	16.5	19.8	22.0	25.5	29.4	32.6	38.0	47.0	72.4	81.4	103	127
SCM 53	53	5.13	6.36	9.96	13.2	16.3	19.3	23.3	25.9	30.0	34.6	38.4	44.7	55.4	85.2	95.9	121	149
SCM 59	59	5.71	7.08	11.1	14.7	18.2	21.5	25.9	28.8	33.4	38.5	42.7	49.8	61.7	94.9	107	134	166

Saft Industrial Battery Group

12, rue Sadi Carnot
93170 Bagnolet - France
Tel: +33 1 49 93 19 18
Fax: +33 1 49 93 19 64

www.saftbatteries.com

Doc N° 21137-2-0704

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Société anonyme au capital de 31 944 000 €
RCS Bobigny B 383 703 873

Pragma - Printed in France - 2k



SAFT